

**Sturdy** construction  
**Simple** operation  
**Economically** priced




## TS Series drum scales by Triner Scale

- 2,500 lb x 0.5 lb
- LOW ANGLE RAMP
- QUICK AND EASY SET UP
- DIAMOND PLATE DECK
- TWO PART EPOXY COATED
- OPTIONAL CONFIGURATIONS



Top-access  
leveling adjustment



Built in protection  
for harsh environments



Also available in stainless steel  
for demanding applications

# TS Series

Industrial Duty Drum Scales  
by Triner Scale

## TRINER SCALE

"Scales for Business & Industry Since 1897"

### SPECIFICATIONS

#### Weighing Deck

- Quick, easy setup
- High accuracy
- Heavy duty steel construction
- Diamond steel deck plate
- Durable two coat epoxy finish
- Height adjustable leveling feet
- Top access to leveling feet for easy adjustment
- Side access summing card with gasketed seal
- Four premium alloy steel nickel plated loadcells
- Loadcells are watertight
- Loadcell capacity is 2 times the scale capacity
- Built in overload protection

#### TS-700 MS Digital Indicator

- Bright easy-to-read led display
- Easy, 8-button operation
- Tare function
- Hold feature with data and peak hold
- Rs-232 port for optional printer
- Tilt adjustable wall or desk mount stand
- Lb / kg conversion
- 120 VAC power with AC adapter
- Check weighing
- Weight accumulation
- Keys
  - On/Off
  - Hold
  - Total
  - lb/kg
  - Gross
  - Tare
  - Zero
  - Print (sends data to printer or PC)

#### Standard Configuration Includes


- Weighing deck, one ramp configuration
- TS-700 MS digital indicator
- 15 ft. home run cable with stainless steel outer sheath
- AC adapter
- Operating manual




Standard configuration  
shown with optional digital indicator stand




Includes AC adapter and  
five-wire home run cable  
with quick-connect plug.

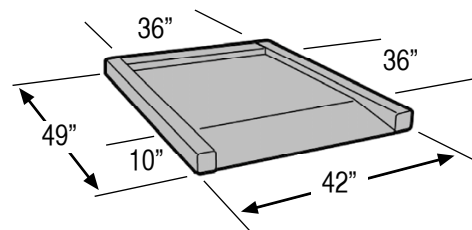

Standard Configuration:  
One Ramp

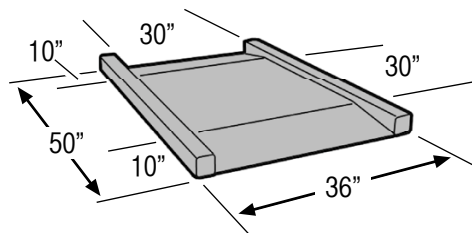

Optional Configuration:  
Two Ramps

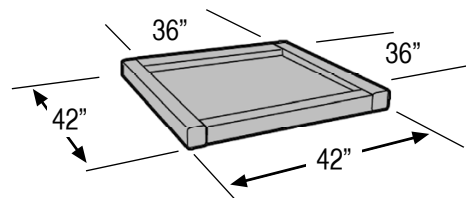

Optional Configuration:  
Spill Containment

Triner Scale and Manufacturing Company, Inc.  
Toll Free: (800) 238-0152  
Tel: (662) 890-2385 Fax: (662) 890-2386  
[www.trinerscale.com](http://www.trinerscale.com)