




5,000 lb Capacity in 2 lb Increments For Class 2 Carriage Forklifts


ANNOUNCING THE BREAKTHROUGH THAT FORKLIFT WEIGHING HAS BEEN WAITING FOR!

Here is the new standard in forklift scale installation and use:



2 Clip new iForks onto carriage

Quick-mount the digital indicatorand GO!

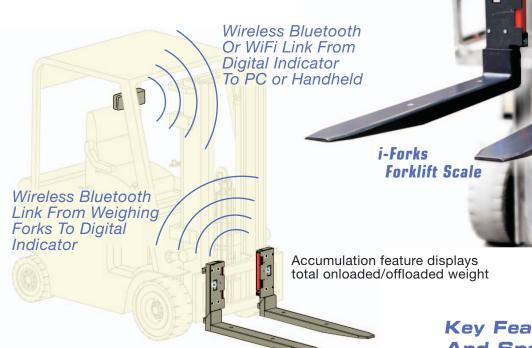

The new iForks forklift scale is available with wireless data transfer from the digital indicator to a PC or Handheld

- RAPID INSTALLATION
- 180 HOURS OF CONTINUOUS OPERATION TIME WITH STANDARD D-CELL BATTERIES
 - TOTALLY WIRELESS

Key Features And Specifications

- Capacity: 5.000 lb x 2 lb
- Fork Dimensions: 45.3 in. (L) x 5.2 in. (W) x 2.1 in. (H)
- Fork Weight: 147 lbs each
- Power:

Forks: 4 D-cells per fork Digital Indicator: 4 AA-cells

 Entire system can be installed in less than 10 minutes

Triner Scale and Manufacturing Company, Inc.

8411 Hacks Cross Road Olive Branch, MS 38654

Tel: (662) 890-2385 Fax: (662) 890-2386

Toll Free: (800) 238-0152 Email: info@trinerscale.com

TRINER SCALE

Accurate Around the World Since 1897 www.trinerscale.com

iForks Wireless Forklift Scale System

Specifications

Weighing Forks


DIMENSIONS in inches

A	Fork length		45.3
В	Fork width	2	5.2
C	Fork height, maximum	•	2.1
D	Height carriage		16
E	Fork drop		3/4.3
F	Width of fork base		4
G	Width of battery pack		2
Н	Fork width including battery pack		6
1	Total height		21.6
	A CONTRACTOR OF THE CONTRACTOR		


Weight, per fork : 147 Lbs

Tolerances ± 0.1 inch





Digital Indicator

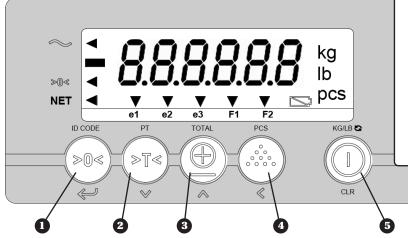

- Zero Setting/Code Entry
- 2 Automatic Tare/Pre-set Tare
- 3 Print Weight and Add to Total/Check Subtotal
- 4 Sample Piece Weight/Enter Piece Weight
- 6 On/Off



- Automatic and manual zero setting
- Gross/Net weighing
- Automatic tare and manual tare weight entry
- Totalling with sequence number
- ID-code entry (5 digits)
- Piece counting by sampling or weight entry
- Internal clock for date & time
- Auto shut off
- Large, 0.7 inch display digit height
- 200% overload protection
- Accuracy of 0.1% of applied weight

Triner Scale and Manufacturing Company, Inc.

8411 Hacks Cross Road Olive Branch, MS 38654 Tel: (662) 890-2385 Fax: (662) 890-2386

Toll Free: (800) 238-0152 Email: info@trinerscale.com



Accurate Around the World Since 1897

www.trinerscale.com