

TRINER SCALE

Rate Chip Installation

Instructions for:


Scale Model Part No.
VP-70RC0034

Do not install the new
rate card prior to 7-12-26

IMPORTANT: READ BEFORE PROCEEDING!


To install your new Rate Chip:

1. Turn the scale off and unplug the AC adapter from the wall outlet. If the scale is connected to a remote device, unplug that connection also.
2. The rate chip compartment is located on the right side of the scale. Use a small flat head screw driver and gently pry open the plastic rate chip compartment cover.

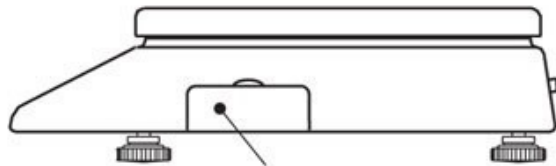

Rate Chip Compartment Cover

3. Remove the rate chip card by grasping the edges and pulling straight out.
4. The new rate card is labeled "THIS SIDE UP!". Be sure the card is facing right side up, then fully insert the card into the scale.

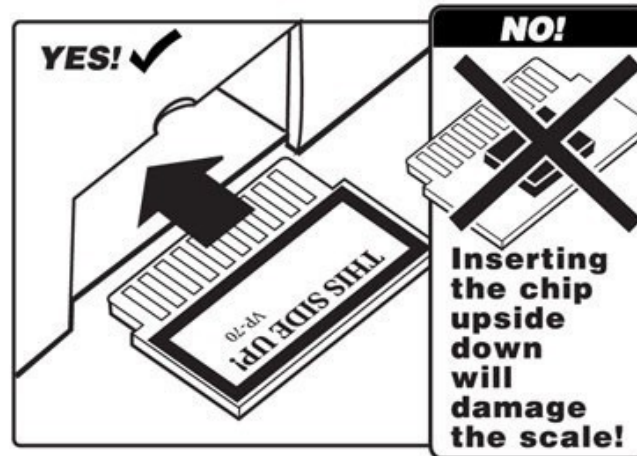

NOTE: The new rates have two rate tables: Retail and Commercial. The scale will display a prompt before loading each table.

5. Reconnect the AC adapter and power on the scale. The screen will display the prompt: "LOAD NEW RATES?", and will also display the valid date of the new rate table: 7-12-26 (Day/Mo/Yr).

- 6) Load the new Commercial rates by pressing the YES key. The screen will display "COPY NEW VERSION..." for about 30 seconds while the new rate table is being loaded. The screen will then display the "LOAD NEW RATES?" prompt for the commercial rates.

- 8) Load the new Retail rates by pressing the YES key. The display will show "COPY NEW VERSION..." for about 30 seconds while the new rate table is being loaded. When completed, the scale will automatically revert to the home screen.

- 9) The scale is now ready to use with the new rate tables for Retail and Commercial rates.

Triner Scale & Mfg. Co., Inc.
8411 Hacks Cross Road
Olive Branch, MS 38654-4010
TEL: 1-662-890-2385 or
1-800-238-0152